

GPF-25D series

25W single output constant voltage/current power supply with 3 in 1 dimming function



■ Features:

- CV + CC mode power supply
- Built-in active PFC function
- Universal AC input / Full range
- Protections: Short-circuit / Over current / Over voltage / Temperature
- Built-in 3 in 1 dimming function: 0-10V or PWM or resistance
- Cooling by free air convection
- 100% full load burn-in test
- Isolation class II
- Fully encapsulated with IP67 level

□ IP67 CE SELV

ELECTRICAL SPECIFICATION

MODEL	GPF-25D-350		GPF-25D-700		GPF-25D-1050	
OUTPUT						
NO OUTPUT DC VOLTAGE (max.)	73V		37V		26V	
VOLTAGE RANGE [2]	44 ÷ 72V		22 ÷ 36V		15 ÷ 24V	
RATED CURRENT	350mA		700mA		1050mA	
RATED POWER	25.2W		25.2W		25.2W	
LINE REGULATION	± 1%					
LOAD REGULATION	± 2%					
TOLERANCE [4]	± 3%					
CURRENT ACCURACY	± 3%					
RIPPLE & NOISE (max.) [3]	5V _{p-p}		3V _{p-p}		3V _{p-p}	
SETUP, RISE, HOLD UP TIME [5]	1000ms, 80ms, 60ms / 230VAC; 1000ms, 80ms, 30ms / 115VAC at full load					
INPUT						
VOLTAGE RANGE	85 ÷ 277VAC					
FREQUENCY RANGE	47 ÷ 63Hz					
EFFICIENCY (typ.)	86%		85%		84%	
AC CURRENT (typ.)	0.4A/115VAC, 0.25A / 230VAC					
POWER FACTOR	PF > 0.95 / 230VAC; PF > 0.99 / 115VAC at full load					
INRUSH CURRENT (typ.)	65A / 230VAC					
LEAKAGE CURRENT(max.)	2mA / 240VAC					
PROTECTIONS						
OVER CURRENT	Range: 95 ÷ 108% rated output current					
	Type: constant current limiting – CC mode. Auto-recovery.					
SHORT CIRCUIT	Type: hiccup mode, recovers automatically after fault conditions is removed.					
OVER VOLTAGE	80 ÷ 95V		42 ÷ 52V		30 ÷ 36V	
	Type: shut down output voltage. Re-power on to recovery.					
OVER TEMPERATURE	Range: 140°C – detect on main control IC					
	Type: shut down output voltage, recovers automatically after fault conditions is removed.					

GPF-25D series

25W single output constant voltage/current power supply with 3 in 1 dimming function



ENVIRONMENT

WORKING TEMPERATURE	-30°C ÷ 70°C (Refer to Derating Curve)
WORKING HUMIDITY	20 ÷ 95% RH non-condensing
STORAGE TEMPERATURE AND HUMIDITY	-40°C ÷ 80°C, 10 ÷ 95% RH non-condensing
TEMPERATURE COEFFICIENT	± 0.03% / °C (0°C ÷ 50°C)
VIBRATION	10 ÷ 500Hz, 5G, 10min / cycle, period for 72min. each along X, Y, Z axes

SAFETY & EMC REGULATIONS


SAFETY STANDARDS	Compliance to EN61347-1, EN61347-2-13, IP67
WITHSTAND VOLTAGE	I-P/O-P: 3kVAC
ISOLATION RESISTANCE	I-P/O-P: 100MΩ/500VDC/25°C/70%
EMC EMISSION	Compliance to EN55015
EMC IMMUNITY	Compliance to EN61547; EN61000-4-2, -3, -4, -5, -6, -8, -11
HARMONIC CURRENT	Compliance to EN61000-3-3; EN61000-3-2 class C (≥ 60% load)

OTHERS

DIMENSIONS	138 x 43 x 34mm
WEIGHT AND PACKING	0.3kg; 40pcs./box; box weight and dimensions: 13kg, 34 x 25 x 32cm

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Constant current operation region is suitable for rated current (if dimming function is not used, refer to section "Dimming operation"). This is the suitable operation region for LED related applications, but please reconfirm special electrical requirements for some specific system design.
3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF i 47μF parallel capacitor.
4. Tolerance includes set up tolerance, line regulation and load regulation.
5. Setup and rise time is measured from 0 to 90% rated output voltage.
6. Power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment must be re-qualify to comply with EMC Directives.

MECHANICAL SPECIFICATION

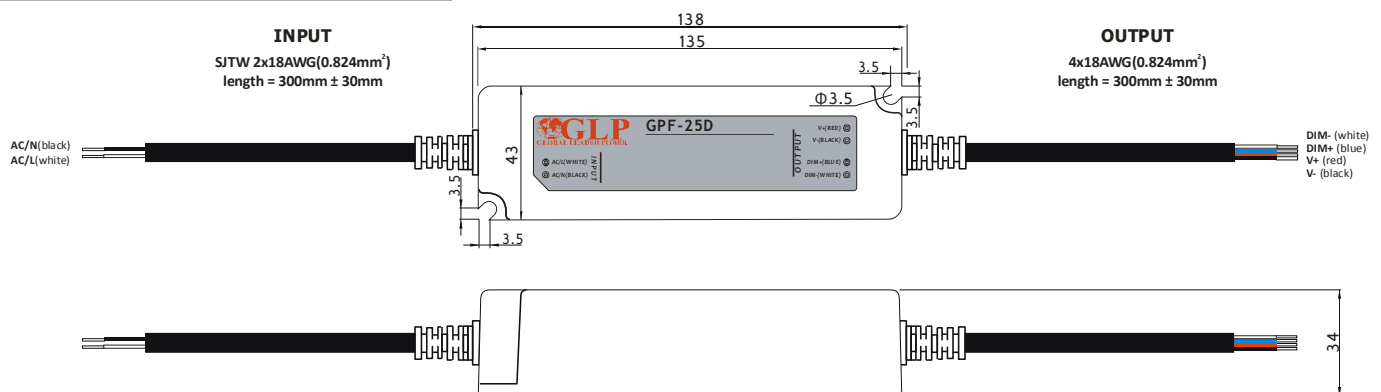


GPF-25D series


25W single output constant voltage/current power supply with 3 in 1 dimming function



DERATING CURVE

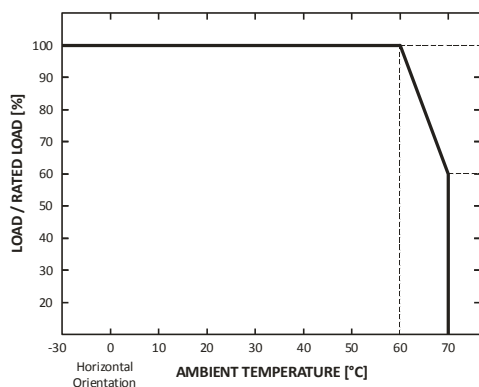

STATIC CHARACTERISTICS

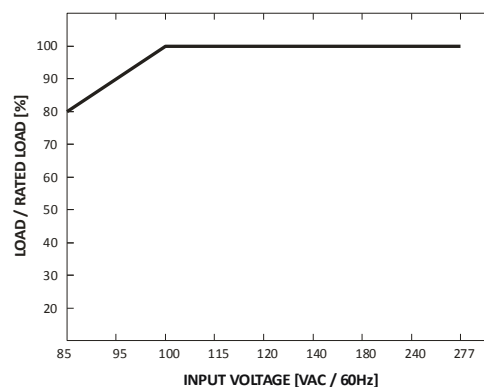

DIMMING OPERATION

For use dimming function connect dimmer to DIM+ and DIM- terminals. You can use dimming function by one of three ways:

1. By variable resistance 10kΩ÷100kΩ.

Resistance	0kΩ	10kΩ	20kΩ	30kΩ	40kΩ	50kΩ	60kΩ	70kΩ	80kΩ	90kΩ	100kΩ	Przerwa
Output current [±3%]	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	100%

2. By variable DC voltage 1÷10V.

DC Voltage	0V	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	Przerwa
Output current [±3%]	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	100%

3. By variable PWM signal 10%÷100%, $f > 1\text{kHz}$, $U = 10\text{V}$.

PWM	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	Przerwa
Output current [±3%]	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	100%

Through dimming function output current is adjusted within range 0% ÷ 100% of rated current and this is constant current mode.